



With its efficient mixing system and a tank which is specially designed to avoid sedimentation, this is an essential accessory for all magnetic particle inspection equipment.

Moreover, it is easily adaptable to all sorts of test bench. It has a removable tank.

CHARACTERISTICS:

Description: Passivated stainless steel tank 304 L mounted on skis
 Removable cover
 Standard direct passage pump motor
 Strainer on cover

Dimensions : 470 x 300 x 700 mm (L x W x H)

Weight: 24 kg

Capacity: 15 litres

Voltage: 230 V or 400 V three-phase

Power: 210 W


Flow rate: 100 l/min at 0.2 bar

Passage diameter: 20 x 27

Compatible products: Water or organic (oil)

On request: High and low level

Deliverable with Gun and pipe (optional)

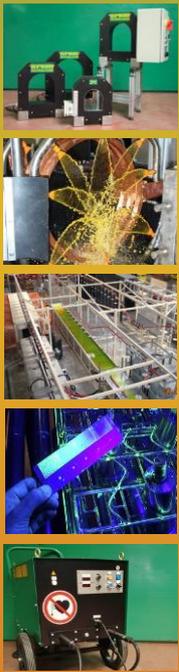

**FLUOGRAPHE
 CONTROMAG
 SONDEX
 FLUXO**

