

Produit

**EPROUVETTE
CRIQUEE TYPE 2**

Référence


DFTA054B

Date

01/03/2005

Page

1/1

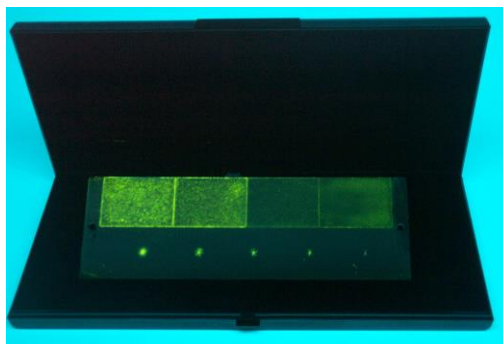

DESCRIPTION of the basic material

Stainless steel - type 2 Cr Ni Mo 17.12.3 (1.4432) EN 10.088.1 Initial hardness under HV 20 = 150 ± 10

Surfacing of one side

Chemical Nickel + flash chrome (total thickness: $60 \mu\text{m} \pm 3 \mu\text{m}$)

CHARACTERISTICS

Divided into 2 sides, you can find:

On one side :


- 4 surfaces with their own specific progressive roughness destined to check the washing characteristics (products, rinse installation).

On the other side :

- 5 star-shaped indication networks with progressive sizes (3 / 3,5 / 4 / 4,5 / 5,5 mm) created by stamping the opposite side.

IDENTIFICATION

Each part is identified one by one using engraving and is delivered with its conformity certificate.

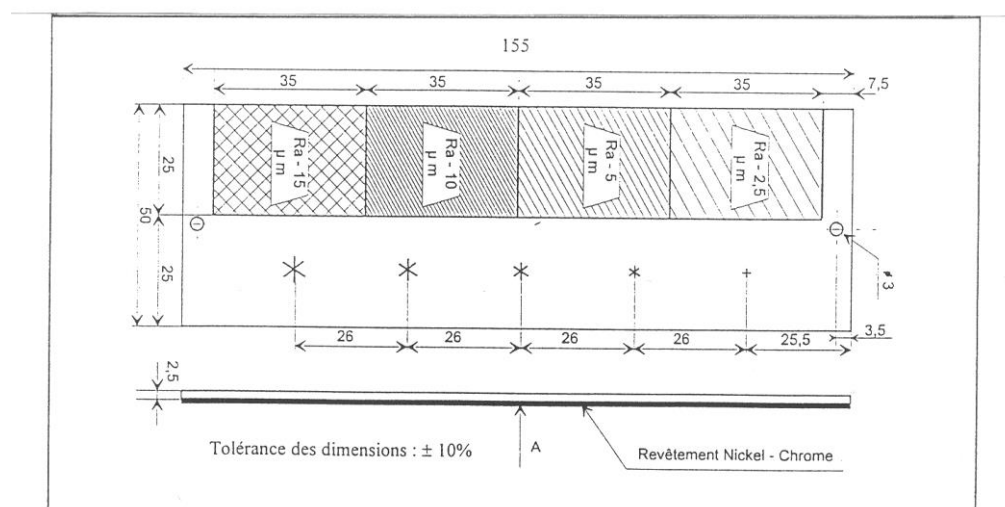

SREM Technologies se réserve le droit de toutes modifications.