



USE:

In accordance with Boeing's dye penetration test procedure, the gun O1 enables you to wash the parts thoroughly by spraying them with water.

CHARACTERISTICS:

Presentation: Brass gun - Nylon finishing and handle

Trigger guard

Trigger lock

Brass nozzle (1 TG2 and 1 TG10)

Weight: 430 g

Dimensions: 203.2 x 166.7 x 28.6 mm

Connection G1/4: Quick connector STAUBLI RPL 08.1151


Water flow: 0.8 l/min at 1 bar

On request: Deliverable with connection kit and pipe

ASSEMBLY OF NOZZLES TG2 or TG10:

- Position the desired nozzle and the brass ring in the fixing nut.
- Fix the assembly on the gun.

N.B. - see photo for the direction of the parts.

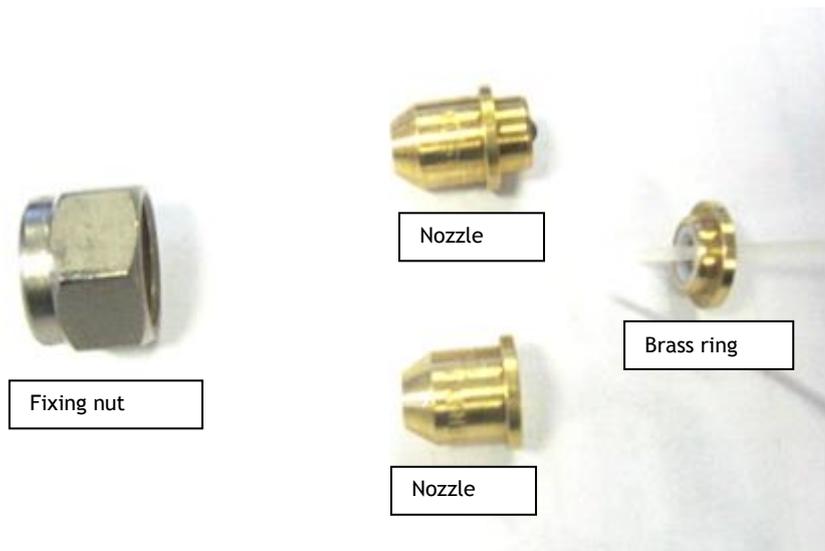

NOZZLE CHARACTERISTICS:

At a pressure of 1.5 bar, we have:

	Flow rate (l/min)	Spraying angle (°)
TG2	1.1	50
TG10	5.4	67

FLUOGRAPHE
CONTROMAG
SONDEX
FLUXO

