




USE:

This device is used to spray the indicator product over the parts that are being magnetised.
Used on a fixed or mobile test bench, it can complement the automatic spraying system.
Supplied with quick connector.

CHARACTERISTICS:

Description: Satin finish aluminium handle
The flow rate can be adjusted by pressing on the trigger
Weight: 350 g
Dimensions: Length 250
Dimensions: 200 x 200 mm
Connection: Connector RPLO 8 - 1 151
Connector RPLO 8 - 6 808
Flow rate: 0.325 m³/h
Use: With water or kerosene
On request: Deliverable with nitrile pipe 10 x 17 (length 2 m unless otherwise specified)

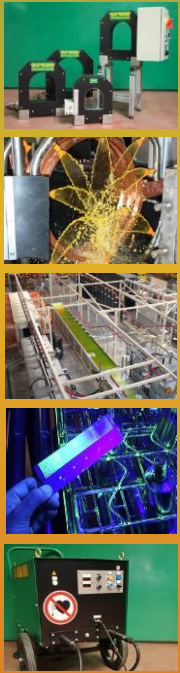

**FLUOGRAPHE
CONTROMAG
SONDEX
FLUXO**

